



Safety Film

TYPE

ECO 4011

HardCoat


Clear

Inside Installation

Technical Specifications*

Solar Transmittance	89 %
UV-Transmittance (measured at 300 - 380 nm)	< 5 %
Visible Light Transmittance	89 %
Thickness	100 µ

Performance of Film*

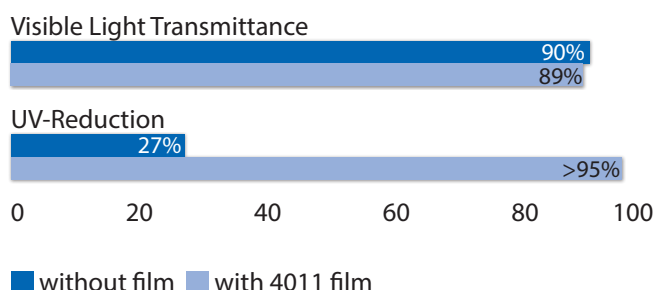

* on 4 mm float glass



Material construction self adhesive film

- Clear 1-layer polyester film.
- Scratch resistant hard coat on the surface.
- Siliconised liner on the adhesive.
- High quality pressure sensitive adhesive system (water activated).

Possible applications

- Safety film for the protection of glazing.
- Safety film to prevent injuries by flying fragments of glass (in particular in kindergartens, schools and public places).

All technical specifications are subject to tolerances within the industrial standards and should only be used for comparison purposes.

BRUXSAFOL is not liable for any glass damages resulting from unprofessional installation. Minimal color differences are possible! All information, technical specifications and usage recommendations have been tested carefully, but BRUXSAFOL can not guarantee the completeness and correctness. In particular, listed data does not give any definite confirmation of properties and application possibilities, since the manufacturer reserves the right to change the technical data without notice. Respective applications of BRUXSAFOL products should therefore be carefully tested and in case of doubt be checked with the BRUXSAFOL management.

12/2012